

WEATHER-RITE™ UHA - Series Technical Data

Model		30	45	60	75	100	125	150	175	200	225	250	300	350	400
Total Input	[Btu/h] x [1000]	30	45	60	75	100	125	150	175	200	225	250	300	350	385
Total Output	[Btu/h] x [1000]	24.6	36.9	49.2	61.5	82	102.5	123	143.5	164	184.5	205	246	288.6	315.7
Efficiency		82% - All Models													
Number of Burners		2	3	4	5	6	7	7	8	9	10	11	12	14	14
Gas Connection	[in]	3/8	3/8	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4	3/4
Inlet Pressure	[in wc] NG Min. LPG Propane Min. NG & LP Propane Max.	5 - All Models 12 - All Models 14 - All Models													
Electrical Supply		115 V / 60 Hz / 1 Ø - All Models													
Full Load Amps @ 115 V		3.0	3.0	4.1	4.1	5.8	5.8	7.1	7.1	10.6	10.6	10.6	11.6	11.6	11.6
Air Volume	[CFM]	691	691	1376	1376	1902	1902	2245	2245	3716	3716	3716	4663	4663	4663
Recommended Maximum Mounting Height	[ft]	12	12	15	15	20	20	20	20	25	25	25	30	30	30
Number of Axial Fans		1	1	1	1	1	1	1	1	1	1	1	2	2	2
Axial Fan Diameter	[in]	10	10	16	16	16	16	16	16	19.7	19.7	19.7	16	16	16
Horsepower		.06	.06	.08	.08	.2	.2	.2	.2	.3	.3	.3	.4	.4	.4
Fan Motor Amps @ 115 V		1.8	1.8	2.6	2.6	4.3	4.3	4.3	4.3	4.7	4.7	4.7	8.6	8.6	8.6
Fan Motor RPM		1630	1630	1030	1030	1175	1175	1200	1200	1085	1085	1100	1155	1155	1155
Fan Motor Type		SP	SP	SP	SP	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC
Flue Size	[in]	4 - All Models													
Combustion Air Size	[in]	4	4	4	4	4	4	4	4	4	4	4	5	5	5
Weight	[lb]	65	70	85	90	105	110	205	225	255	265	270	355	375	375

Important Notice

The equipment described in this Data Sheet is suitable for most commercial and industrial heating applications. However, in certain environments, particularly where there is a chlorinated atmosphere (e.g. near degreasing plant or other solvent processes) or a particularly dusty atmosphere, specialist advice should be sought at the design stage. Weather-Rite LLC reserves the right to alter product specification details without notice.

Installation Code and Annual Inspections:

All installations and service of WEATHER-RITE™ products must be performed by a contractor qualified in the installation and service of products sold and supplied by Weather-Rite LLC and conform to all requirements set forth in the WEATHER-RITE™ manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Weather-Rite LLC recommends that a qualified contractor annually inspect your WEATHER-RITE™ products and perform service where necessary, using only replacement parts sold and supplied by Weather-Rite, LLC.

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through WEATHER-RITE™ representatives. Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

This product is not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgement.

Weather-Rite LLC

616 North 5th Street
Minneapolis, MN 55401
Telephone: 612.338.1401
Fax: 612.338.6783

www.weather-rite.com

© 2006 Roberts-Gordon, LLC All rights reserved. No part of this work covered by the copyrights herein may be reproduced or copied in any form or by any means – graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems – without written permission of Roberts-Gordon, LLC.

UHA - Series

Axial Fan Tubular Unit Heaters



◀ UHA Models 30 - 125

UHA Models 150 - 400 ▶



- Reliable ignition with direct spark ignition burners.
- Minimize summer heat build-up with remote fan operation.
- Longer life and less maintenance with optional stainless steel heat exchangers.
- Variable air throw direction with adjustable horizontal louvers and optional adjustable vertical louvers.

- Reduce dirt build-up on burners and extend life of heat exchanger with separated combustion units.
- Installation and operation flexibility with rear or top air and flue connections (Models UHA 30 - 125 only).
- Ideal for smaller spaces with low profile design (Models UHA 30 - 125 only).

612.338.1401




WEATHER-RITE™ UHA 30 - UHA 125 Clearance and Dimension Data

Clearances to Combustibles - Low Profile UHA Range (Models 30 - 125)

Above Heater	Below Heater	To Side of Heater	To Rear of Heater	To Front of Heater	Access Side Door	To Flue
1"	0"	1"	18" Airflow Clearance	118"	18" Access Clearance	2"

Dimension Data - Low-Profile UHA Range (Models 30 - 125)

Model		30	45	60	75	100	125
'A' Height	[in]	12	12	17.75	17.75	23	23
'C' Center of Flue [Top Option]	[in]	5.2	5.2	5.2	5.2	6.9	6.9
'D' Center of Flue	[in]	2.5	2.5	2.5	2.5	2.5	2.5
Recommended Mounting Height to Heater Base	[ft]	10	10	12	12	20	20

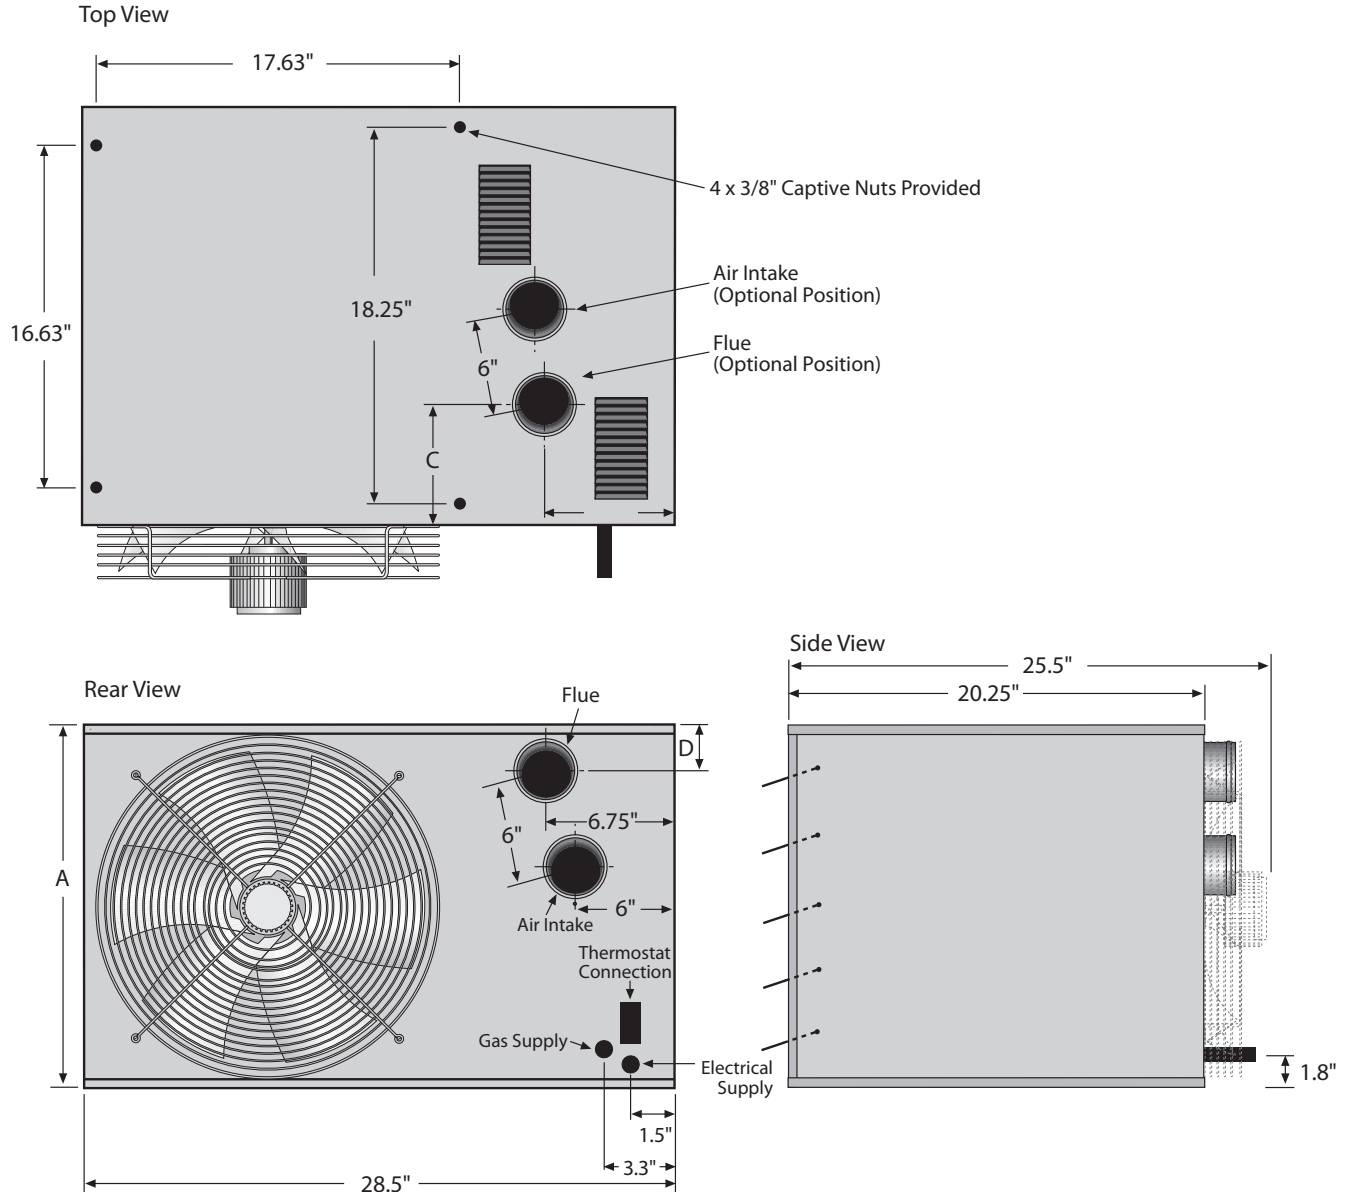

WEATHER-RITE™ UHA 150 - UHA 400 Clearance and Dimension Data

Clearances to Combustibles - Standard UHA Range (Models 150 - 400)

Above Heater	Below Heater	To Side of Heater	To Rear of Heater	To Front of Heater	Access Side Door	To Flue
6"	3"	6"	24" Airflow Clearance	118"	31" Access Clearance	2"

Dimension Data - Standard UHA Range (Models 150 - 400)

Model		150	175	200	225	250	300	350	400
'A' Width	[in]	43	43	43	43	43	50	50	50
'B' Height	[in]	27	27	35.25	35.25	35.25	43.5	43.5	43.5
'C' Depth	[in]	30	30	32	32	32	30	30	30
'D' Support Spacing	[in]	17.6	17.6	17.6	17.6	17.6	24.7	24.7	24.7
'F' Center of Flue	[in]	9.5	9.5	17	17	17	13.6	13.6	13.6
'G' Flue Center to Air Intake Center	[in]	6	6	6	6	6	7	7	7
'H' Position of Flue	[in]	4.5	4.5	4.75	4.75	4.75	4.9	4.9	4.9
'J' Gas Inlet Position	[in]	5.9	5.9	5.9	5.9	5.9	8.7	8.7	8.7
'K' Electrical Supply Position	[in]	3.4	3.4	3.4	3.4	3.4	6.2	6.2	6.2
Maximum Recommended Mounting Height to Heater Base	[ft]	20	20	25	25	25	30	30	30

